

产品特征 Features


- 表面贴装电压控制晶体振荡器  
 Surface Mount Voltage Controlled Crystals Oscillators
- 兼容 TTL/HCOMOS Compatible



产品规格 Specification

电性能参数 Parameter	规格 Specification	
频率范围 Frequency Range	1.750~50.000MHz	
频率稳定度 Overall Frequency Stability	±25ppm~±50ppm	
工作温度 Operating Temperature	-10℃~60℃ \ -40℃~85℃	
储存温度 Storage Temperature	-40℃~85℃ \ -55℃~125℃	
输入电压 Supply Voltage (V <sub>DC</sub> )	<b>HEVC31A</b>	<b>HEVC31B</b>
	+5.0±0.5 V <sub>DC</sub>	+3.0±0.3 V <sub>DC</sub>
输入电流 Supply Current (I <sub>CC</sub> )	15mA~35mA	
对称性 (占空比) Symmetry ( Duty Cycle )	40/60% Std.	
上升和下降时间 Rise and Fall Time	6ns max	
输出停止 \ 启动时间	100ns max	
Output Disable \ Enable Time		
三态启用选项 Tristate Enable Option	Tri-State	
老化率 Ageing @ 25℃±3℃	±3 ppm typical first year, ±10 ppm 10 years	
电压控制范围 Voltage Control Range	+2.5±2.25 V <sub>DC</sub> for 5V	+ 1.65±1.5V <sub>DC</sub> for 3.3 V
转移特性 Transfer Function \ 正转移(随着控制电压的增加, 输出频率增加。)	Positive Transfer (Increasing Control Voltage ,Increases Output Frequency )	
牵引量 Pullability	±50 ppm~±100ppm	
输出负载 Output Load	10TTL\ 15 pf HCMOS	
频率线性 Frequency Linearity	±10%	
所有规格如有变更, 不另行通知。 All Specifications Subject to Change Without Notice.		

外形尺寸( 单位:毫米) Figure and Dimensions (Unit: mm)

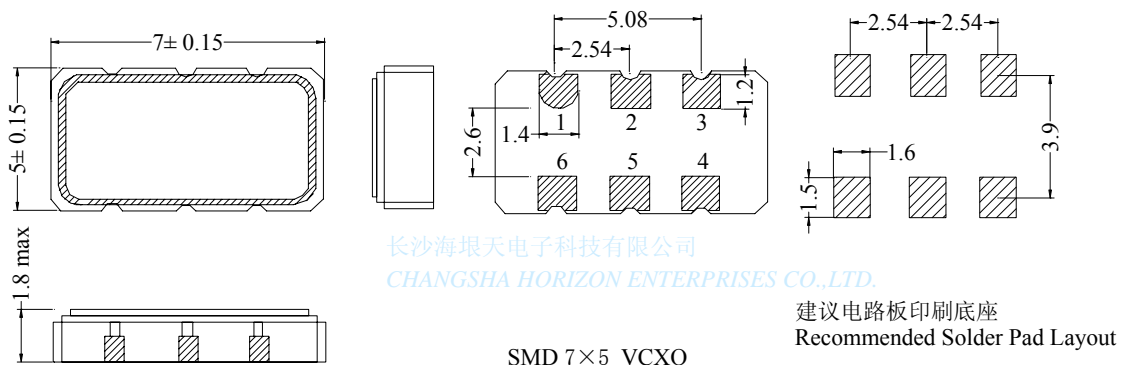

Pin	功能 Function	Pin	功能 Function
1	电压 Voltage Control	4	输出 Output
2	数控或三态 Tri-State or NC	5	数控或三态 NC or Tri-State
3	接地 Ground	6	输入电压 Input Voltage

### 订购须知 Order Information

#### HEVC31□-Frequency- Temp.Range- Overall Freq.Stability-Duty Cycle-Option

<b>HEVC31□</b>	产品系列 Product Family SMD 7×5 VCXO
	<ul style="list-style-type: none"> <li>■ HEVC31A for +5.0±0.5 V<sub>DC</sub></li> <li>■ HEVC31B for +3.0±0.3 V<sub>DC</sub></li> </ul>
<b>Frequency</b>	频率 Frequency( MHz)
<b>Temp.Range</b>	工作温度 Operating Temperature
	<ul style="list-style-type: none"> <li>■ T<sub>1</sub> for -10℃~60℃</li> <li>■ T<sub>2</sub> for -40℃~85℃</li> <li>■ X for custom value</li> </ul>
<b>Overall Freq.Stability</b>	频率稳定度 Overall Frequency Stability
	<ul style="list-style-type: none"> <li>■ H<sub>1</sub> for±25 ppm max</li> <li>■ H<sub>2</sub> for±50 ppm max</li> <li>■ X for custom value</li> </ul>
<b>Duty Cycle</b>	对称性（占空比）Tight Symmetry (Duty Cycle)
	A for Blank-None Required ( 40/60% Std )
<b>Option</b>	选型 Option
	<ul style="list-style-type: none"> <li>■ T For Tri-State</li> <li>■ N For No Connection</li> </ul>

订购举例: Example : HEVC31B-20.000MHz--T<sub>1</sub>-H<sub>1</sub>-A-T

<b>HEVC31B</b>	产品系列 SMD OSC 7×5(PECL)-+3.0±0.3 V <sub>DC</sub>
<b>20.000MHz</b>	频率 Frequency \ f <sub>0</sub> =20.000MHz
<b>T<sub>1</sub></b>	工作温度 Operating Temperature \ T <sub>1</sub> =-10℃~60℃
<b>H<sub>1</sub></b>	频率稳定度 Overall Frequency Stability \ H <sub>1</sub> =±25 ppm
<b>A</b>	对称性（占空比）Symmetry (Duty Cycle)
	A for Tight Symmetry( 40/60% Std )Duty Cycle
<b>T</b>	选型 Option \ T For Tri-State

[Http:// www.horizonxtal.com](http://www.horizonxtal.com)

国际贸易 Horizon International Marketing

国内贸易 Horizon Domestic Marketing

E-mail: horizoncrystals@163.com

E-mail:hqq226@163.com

Fax: 0086 731 8442 2043

Fax: 0086 731 8805 0850

Tel: 0086 731 8442 3897 / 8222 4572

Tel: 0086 731 8805 0851 / 8805 0780